


SECTIONAL VULCANIZER QUOTATION

Customer: **Kinross**


Date: **28/01/2022**

Dimensions & Specifications

Model :	SV2P			42 96
Operating Pressure:		7	[BAR]	
		100	[PSI]	
Platen Length (along splice)	42 "	1066 mm		
Platen Width (across belt on bias)	96 "	2438 mm		
Max. Belt Width Fabric Belt	84 "	2150 mm		
Max. Splice Length Fabric Belt	37 "	950 mm		
Max. Belt Width Steelcord Belt	82 "	2100 mm		
Max. Splice Length Steelcord Belt	29 "	750 mm		
Bias Angle	22 °			

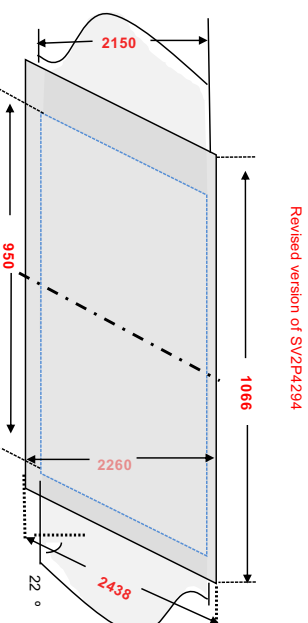

REF : SV2P-4296-22-100-16T-5EB108

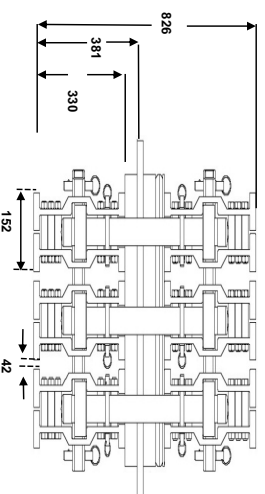

Platensets				Pattern
N°	Width <mm>	Length <mm>	weight <kg>	
1	533	2438	88	2 Sets
Traverse bar type				EB
Bar length		108 "	2743 mm	
Number of Bar Sets			5	

Control Box and Electrical Specifications

The press will be supplied with 2 T6T control box (s) complete with main supply and platen cables

Voltage (Vol)	400
Phase	3
Max. Amperage per platen set	17.8
Cycles [Hz]	50
Power [kW]	24.7



Weights in kgs

	Quantity	Unit Weight	Total
Platens Sets (2 units/set)	2	88.4	353
Bar Sets (2 units/set)	5	82.5	825
Bolts and nuts	10	10.0	100
Control Box	2	10.9	22
Cable Sets	2	7.0	14
Restraint Set TYPE	1	39.3	39
Pressure Bags	*	39.4	39
Bag Plates	*	41.6	42
Additional bar sets	0	54.4	0
Pump Units type HPPC20-4	0	0.0	0
Total Weight [kgs]:			1434
Export Crate, ± 4.2 M3			287
Total Weight [kgs]:			1721

* - the number of pressure bags and bag plates can vary, depending on vulcanizer type and customer wish.
* - Unit weight platenset = weight heaviest single platen!



Pricing

Vulcanizer:

The above SVP vulcanizer is complete with the unique Almex flexible platen, silicon heating element(s) and pressure bag system and 2 T6T remote temperature control panel(s). Rapid Integral water cooling is included.	\$ 66920
--	----------

Options:

C1M COOLING SYSTEM Model C1M portable stainless steel Cooling System with all connections, air over water. Holds 20 liters water and will cool down the vulcanizer to 50° C in less than 5 minutes !!		\$ 565
ALMEX COMPRESSOR GRQ-COMPR-15 Top quality, lightweight, robust compressor for pressurizing the airbag and/or the C1M cooling System. Maximum 15 kg/cm2 pressure. Total weight only 20 kg.		\$ 685
ALMEX SPLICING TOOLKIT - FBRTLKT This toolkit contains all the necessary handtools for splicing fabric belts. Over 35 parts in a solid toolbox.		\$ 895
EZ-FIX STARTER KIT EZ-FIX SK5: 1x Dispensing Gun, 5x Dual Cartridges (5x 400ml) & 10 Mixing Tips. 2-Part Urethan System, No shrinkage, hardens in minutes, cures in hours, No solvents, VOC free formulation, 60 SH		\$ 335
HAND HELD SKIVING TOOL 220V, P1-ES-002 Ideal for Conveyor Belt Cover Removal. This Skiver is the most powerful tool of its size. A full 250 watts of power with oscillating movement of 1,000 to 21,000 rpm. Recommended Tool for efficient Finger-, and Step-splicing		\$ 435
The unique patented design of SureGripTM Belclamps allows for a gripping force that far exceeds all competitive solutions. (1=set4 Clamps & 4 bars) Mark 1: Light Duty for belts up to 600 N/mm / 1 ton WLL*; Mark 2: Medium Duty for belts up to 1200 N/mm / 5 ton WLL*; Mark 3: Heavy Duty for belts up to 2000 N/mm / 7 ton WLL*		\$ 1585 \$ 2295 \$ 3415

NOTE: Prices of the optional parts are only valid when supplied together with Press

Recommended Spare Parts

Spare pressure bag (s)	533 x 2438 mm 21"X96"	\$ 2166
	267 x 2438 mm 10.5"X96"	\$ 1206
Spare heating element (s)	533 x 2438 mm 21"X96"	\$ 1555

NOTE: 10% discount on spare bags and heating elements when ordered together with the press. Average Delivery time 8 weeks!

Terms and conditions

All prices are in US\$ FCA Toronto, Canada including packing for container shipping.

Delivery time: 24 weeks ex works Parry Sound, Canada

Payment terms: 30 days after Invoice date

Quotation validity: 29/03/2022

All our activities, offers, agreements and operations are subject to our general terms and conditions, as attached. Deposited with file no. 1118186 at the Dutch Chamber of Commerce, if not included in this quote can be requested at info@shawalmex.eu

Your contact: Hans van Elst TEL: +31 646878089 E-mail: hans@shawalmex.eu