


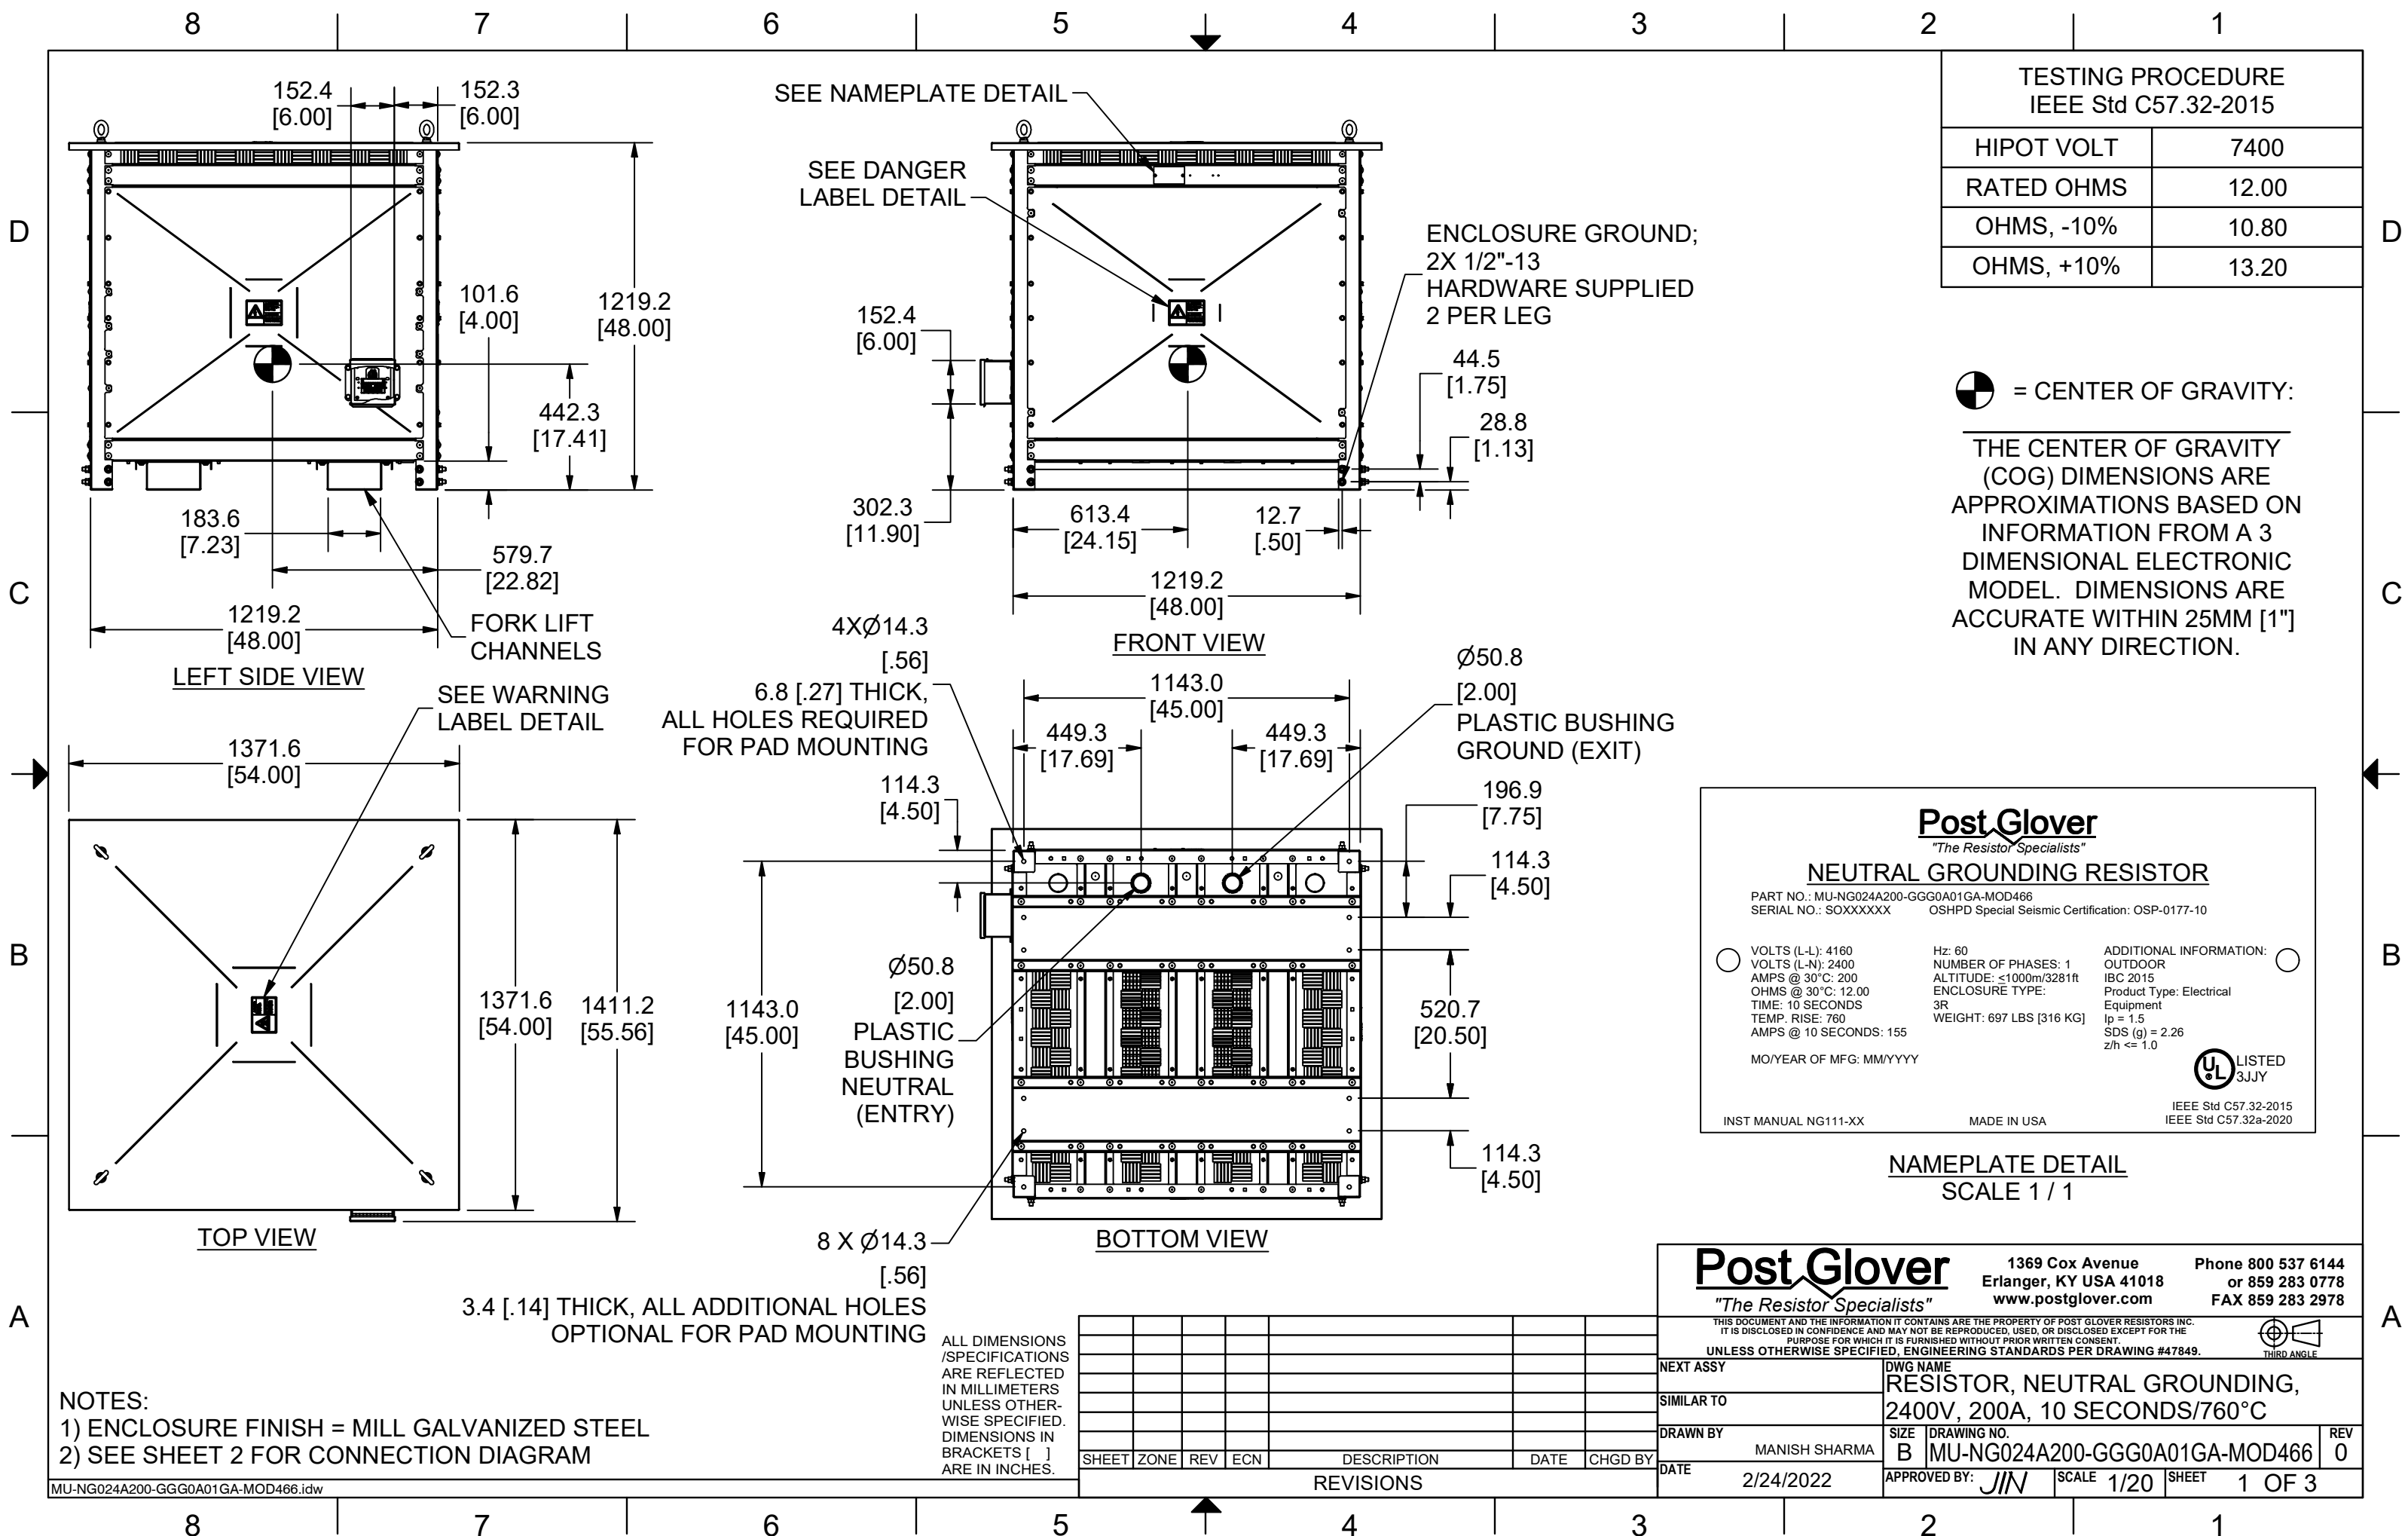


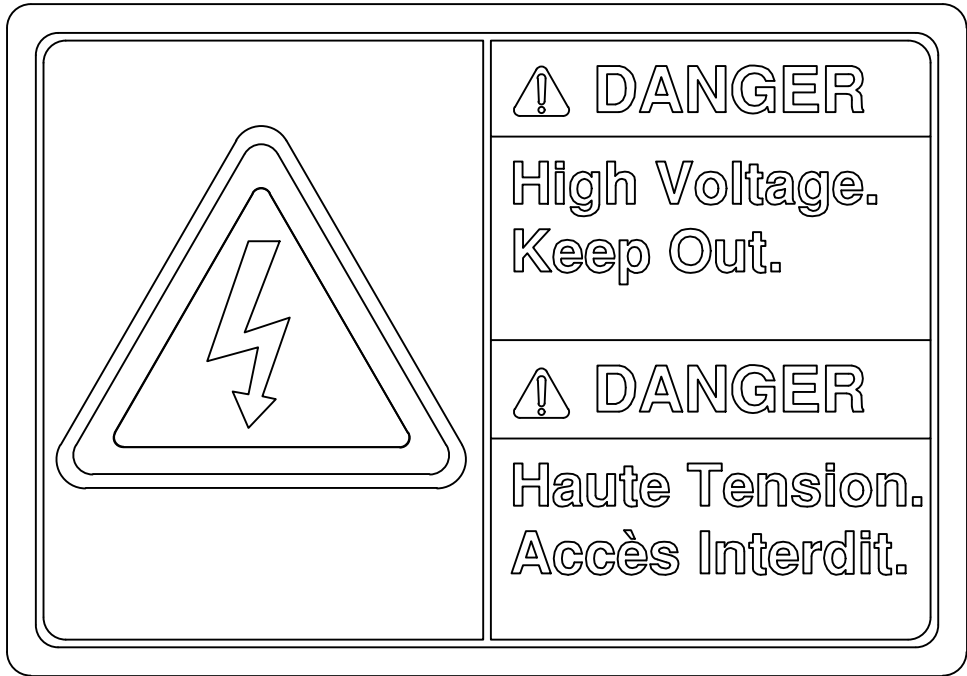


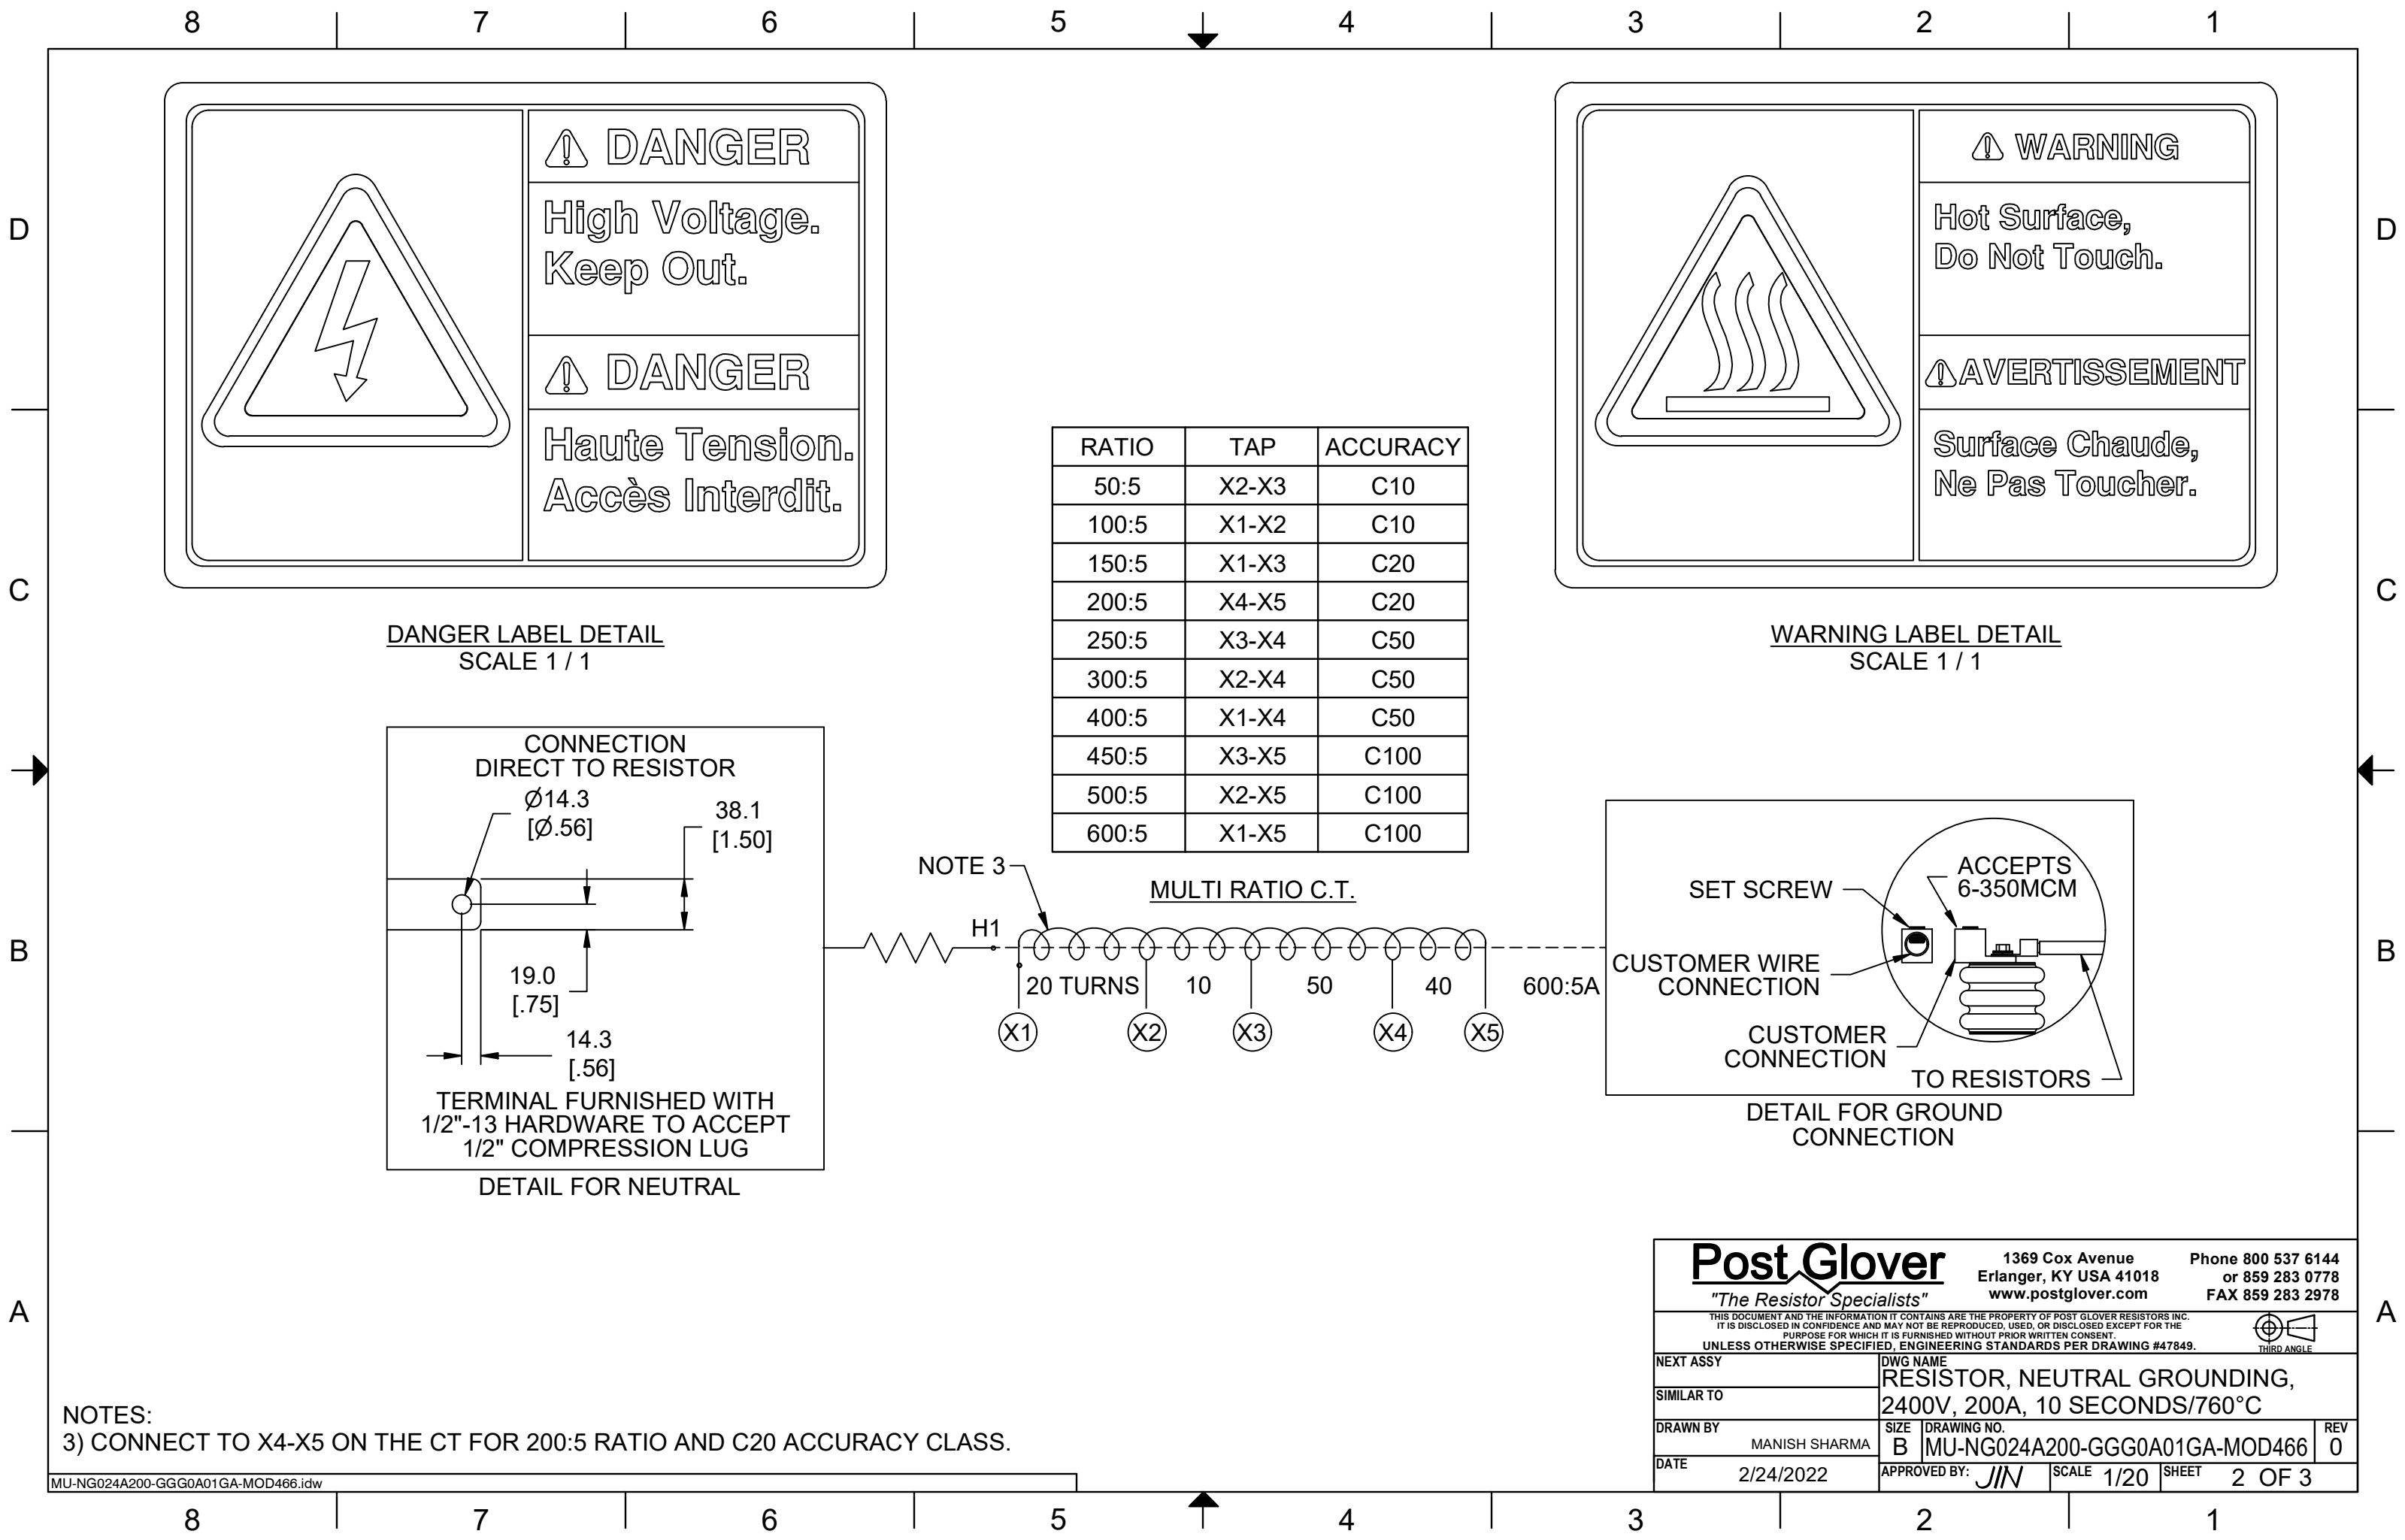



DANGER LABEL DETAIL
SCALE 1 / 1

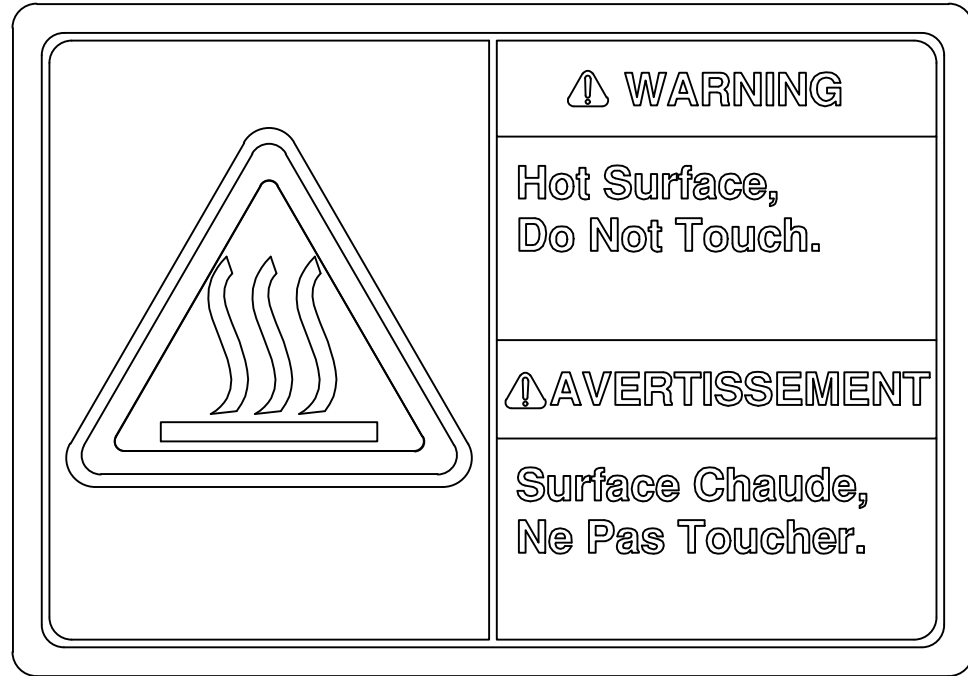

WARNING LABEL DETAIL
SCALE 1 / 1

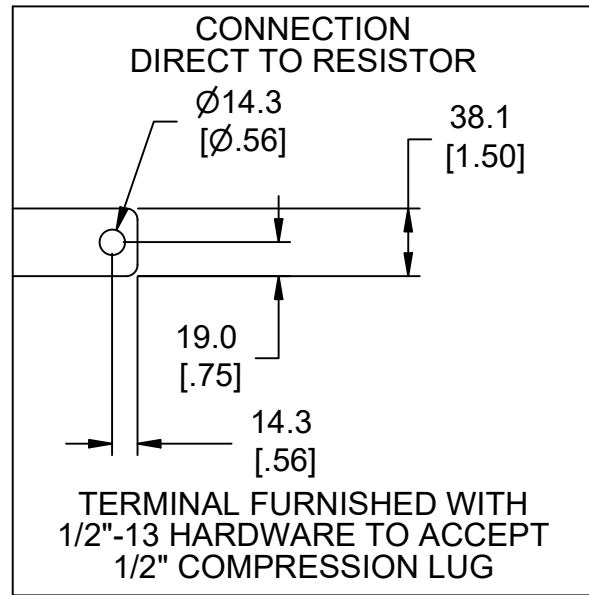

DETAIL FOR NEUTRAL

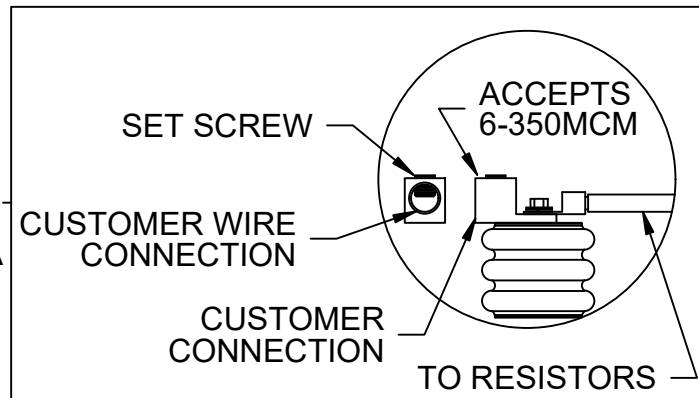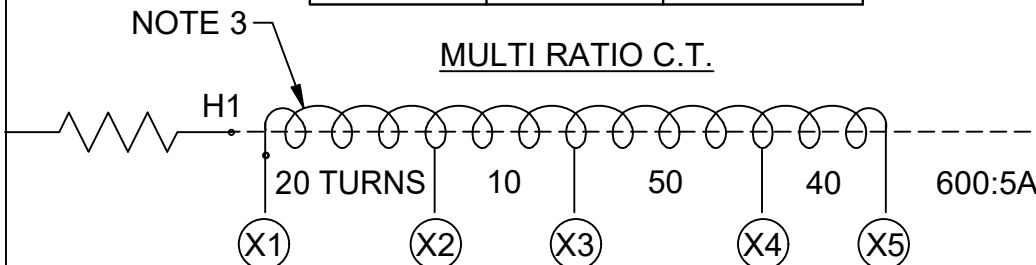


DETAIL FOR GROUND
CONNECTION

NOTES:
3) CONNECT TO X4-X5 ON THE CT FOR 200:5 RATIO AND C20 ACCURACY CLASS.

Post Glover
"The Resistor Specialists"
1369 Cox Avenue
Erlanger, KY USA 41018
www.postglover.com
Phone 800 537 6144
or 859 283 0778
FAX 859 283 2978

THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE THE PROPERTY OF POST GLOVER RESISTORS INC. IT IS DISCLOSED IN CONFIDENCE AND MAY NOT BE REPRODUCED, USED, OR DISCLOSED EXCEPT FOR THE PURPOSE FOR WHICH IT IS FURNISHED WITHOUT PRIOR WRITTEN CONSENT. UNLESS OTHERWISE SPECIFIED, ENGINEERING STANDARDS PER DRAWING #47849.

NEXT ASSY	DWG NAME RESISTOR, NEUTRAL GROUNDING, 2400V, 200A, 10 SECONDS/760°C		
SIMILAR TO	SIZE B	DRAWING NO. MU-NG024A200-GGG0A01GA-MOD466	REV 0
DRAWN BY MANISH SHARMA	DATE 2/24/2022	APPROVED BY: JIN	SCALE 1/20 SHEET 2 OF 3

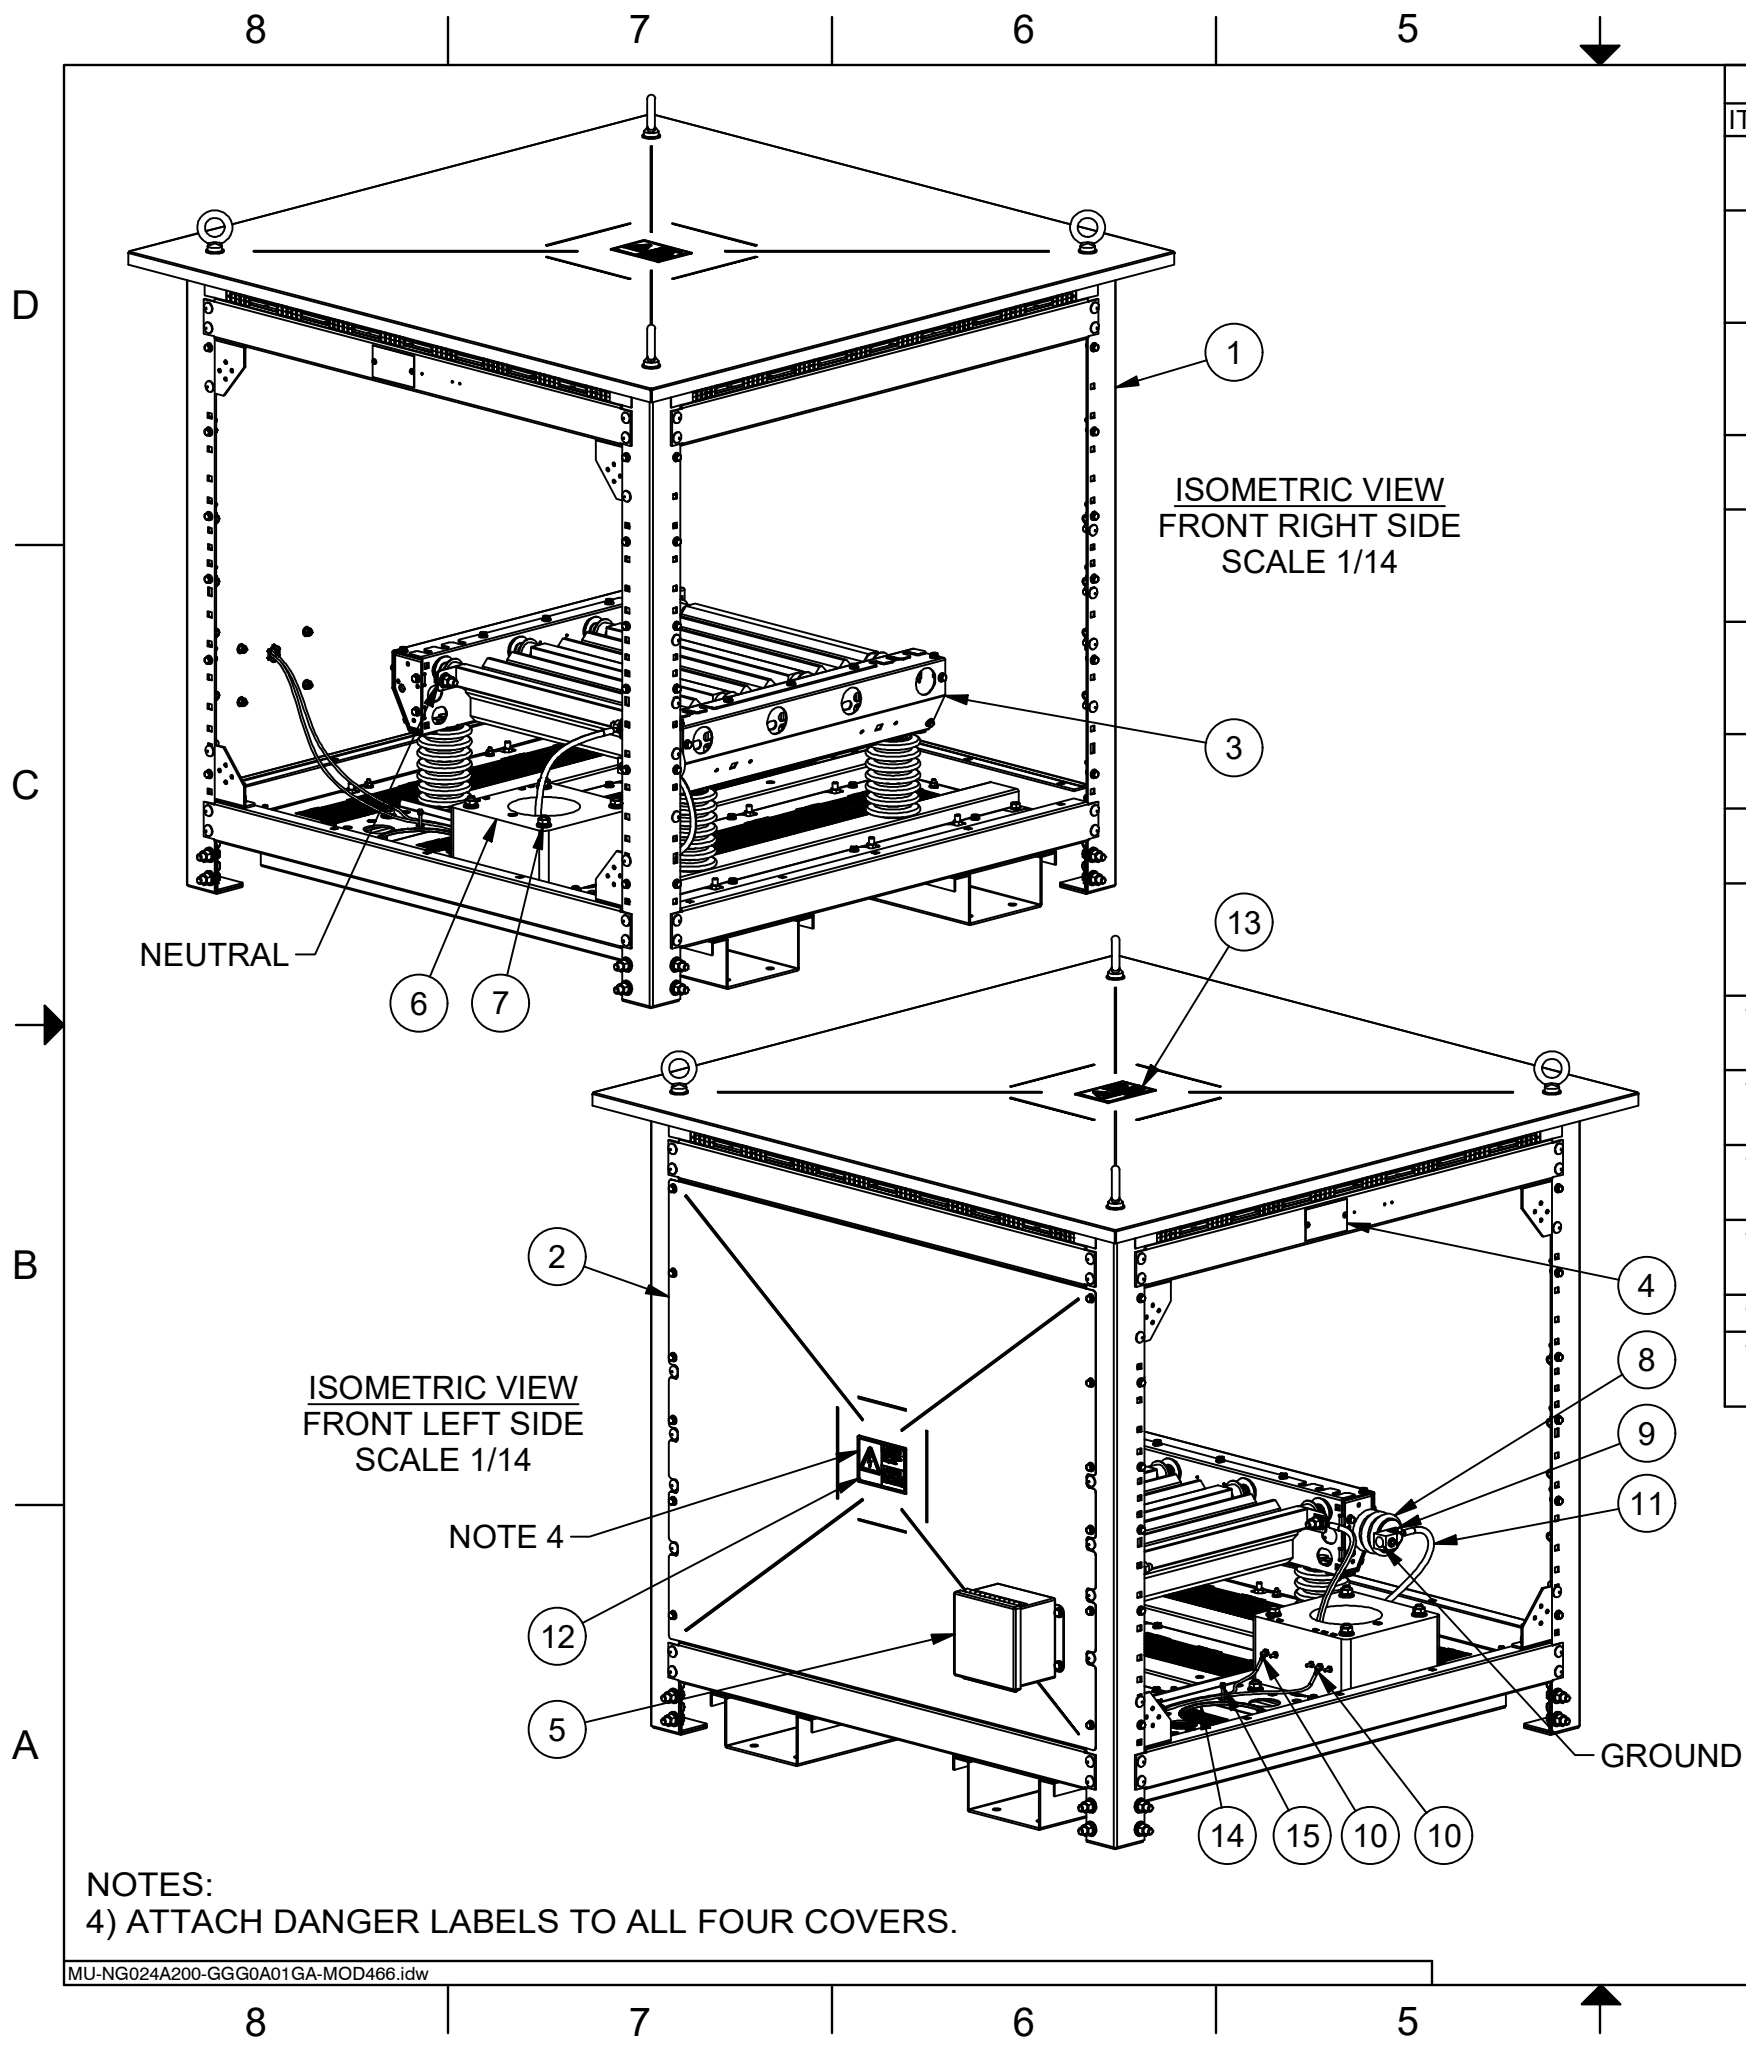

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	NG444-S-2D26	ENCLOSURE, 48" X 48" X 48", SEISMIC QUALIFIED, SDS = 2.26
2	1	EN4848CVS-2D26-A	COVER, 48" X 48", BOTTOM RIGHT JUNCTION BOX MOUNTING, FOR SEISMIC QUALIFIED ENCLOSURE
3	1	MU-NG024A200-GGG0	RESISTOR, NEUTRAL GROUNDING, 2400V, 200A, 10 SEC/760C, FOR 48" X 48" X 48" SEISMIC UNIT
4	1	KIT-NP425X238	KIT, NAMEPLATE WITH RIVETS, 4.25" X 2.38", BLACK ANODIZED ALUMINUM
5	1	KIT-BN4060604CHSS	KIT, JUNCTION BOX, 6"H X 6"W X 4"D, 304 STAINLESS STEEL, NEMA 4X, W/ 4 POLE SHORTING BLOCK
6	1	139-601MR	TRANSFORMER, CURRENT, MULTI-RATIO, 6.50" DIAMETER WINDOW, 50:5 - 600:5, C100, UL RECOGNIZED
7	1	KITHW-CT-S	KIT, HARDWARE, CURRENT TRANSFORMER, SEISMIC NGR
8	1	KIT-I5-2-304	KIT, INSULATOR WITH HARDWARE, 5KV, 60KV BIL
9	1	HLR350-006112	HARDWARE, LUG, MECHANICAL, RING, NON-INSULATED, 350MCM-#6 AWG, 1 HOLE, 3/8" STUD (LA-350)
10	2	KIT-W10SIS-36D-N1R-N1R-01GRY	KIT, WIRE, #10 SIS, 36" LONG, #10 RING LUG EACH END
11	1	KIT-W0875-40D-08R-08R-05BLK	KIT, WIRE, #8, 7500V, 150°C, 40" LONG, 1/2" RING LUG EACH END
12	4	LWMS004	LABEL, 5" x 3.5", DANGER, HIGH VOLTAGE, FRENCH AND ENGLISH
13	1	LWMS005	LABEL, 5" x 3.5", WARNING, HOT SURFACE, FRENCH AND ENGLISH
14	1.570 ft	GEE144F-A-C	GROMMET EDGING, ADHESIVE LINED
15	2	TY525M	CABLE TIE, 7.31" LONG, 0.185" WIDE, NYLON 6.6, 85C RATED

PostGlover
"The Resistor Specialists"

1369 Cox Avenue
Erlanger, KY USA 41018
www.postglover.com

Phone 800 537 6144
or 859 283 0778
FAX 859 283 2978

THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE THE PROPERTY OF POST GLOVER RESISTORS INC. IT IS DISCLOSED IN CONFIDENCE AND MAY NOT BE REPRODUCED, USED, OR DISCLOSED EXCEPT FOR THE PURPOSE FOR WHICH IT IS FURNISHED WITHOUT PRIOR WRITTEN CONSENT. UNLESS OTHERWISE SPECIFIED, ENGINEERING STANDARDS PER DRAWING #47849.

NEXT ASSY

SIMILAR TO

DRAWN BY
MANISH SHARMA

DATE
2/24/2022

DWG NAME
RESISTOR, NEUTRAL GROUNDING,
2400V, 200A, 10 SECONDS/760°C

SIZE
B

DRAWING NO.
MU-NG024A200-GGG0A01GA-MOD466

REV
0

APPROVED BY: *JIN*

SCALE 1/20

SHEET 3 OF 3

THIRD ANGLE