


VALVE SIZE		DIMENSIONS INCHES MILLIMETERS									
		A		B	C	D	E	F	G	H	
IN	MM	ISA	ANSI								
10	250	11.69 297	13.00 330	5.50 140	8.91 226	9.50 241	13.38 340	1.31 33	12 25	1.00 25	14.25 362
12	300	13.31 338	14.00 356	6.38 162	9.91 252	10.50 267	14.38 365	1.38 35	12 25	1.00 25	17.00 432
14	350	15.75 400	17.00 432	7.50 191	10.86 276	11.47 291	15.34 390	1.50 38	12 28	1.12 28	18.75 476

VALVE SIZE		DIMENSIONS INCHES MILLIMETERS		
		J	K	
IN	MM	ISA	ANSI	
10	250	16.00 406	1.88 48	3.19 81
12	300	19.00 483	1.94 49	2.62 67
14	350	21.00 533	2.31 59	


A	VALVE
C	MOTOR & GEAR UNIT
P	CONNECTING PARTS

NOTE:


1. FACE TO FACE DIMENSIONS PER ANSI STANDARD B16.10 OR ISA STANDARD 75.04.
2. SEE A-40129 FOR NON-ANSI FLANGE DRILLING.
3. PULL OUT KNOB TO ENGAGE FOR MANUAL OPERATION. UNIT REMAINS IN HAND OPERATION UNTIL MOTOR IS ENERGIZED.

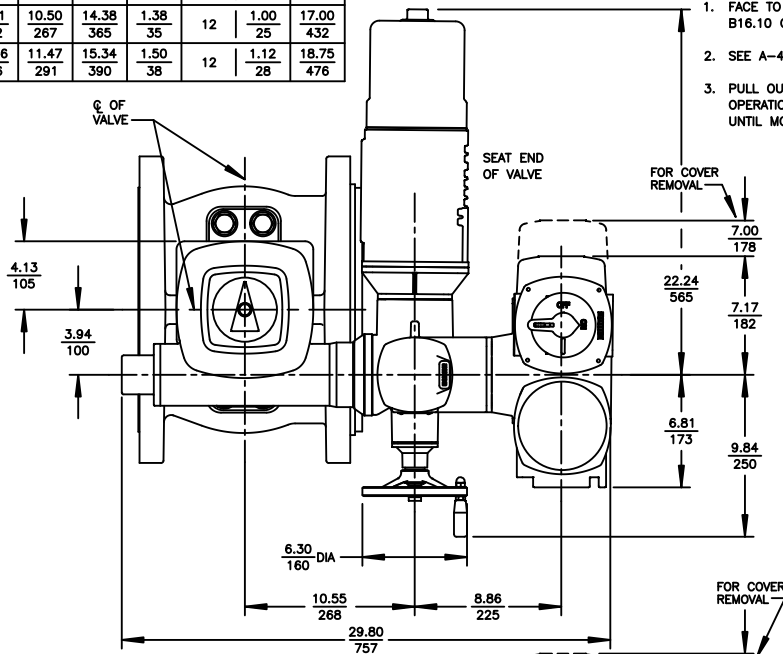


ACTUATOR MOUNTING POSITIONS




STANDARD POSITION SHOWN ON THIS DRAWING




90° POSITION




180° POSITION



270° POSITION

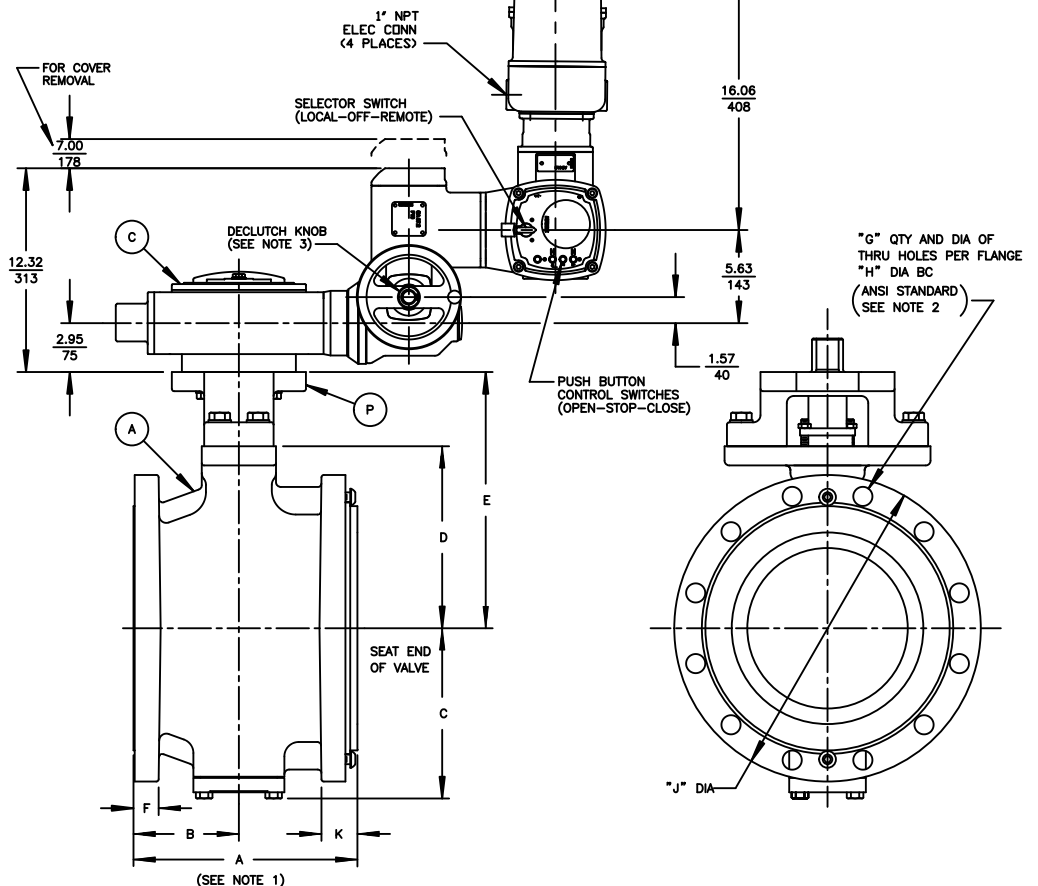

(SEE NOTE 1)



DeZURIK
Sartell, MN USA 56377
www.dezurik.com

VPB V-PORT BALL VALVES SIZE 10-14 CL150 FLANGED AUMA SA(R)07.2/GS100.3 (1 PHASE) AUTOMATIC MOTOR ACTUATOR WITH DISCONNECT SWITCH & T-FRAME			
DOCT. CODE	DRAWN	APPROVED	
C1	JWM	JWM	
CHECKED	DATE	DATE	
JWM	07/06/21	07/06/21	

Z16137